

SWECO®

TECHLUBE™ AUTOMATIC GREASE LUBRICATOR

REDUCE THE RISK OF PREMATURE BEARING FAILURE

Lower maintenance costs and reduce the risk of premature bearing failure in your separation equipment with TechLube™ Automatic Grease Lubricator from Sweco. TechLube is an economic and automatic solution to attaining proper grease lubrication for Sweco motion generator bearings by providing the right grease, at the right time, in the right amount; promoting ease and consistency of maintenance and longer bearing life. TechLube assures bearings are being lubricated eliminating the need for manual greasing and taking the guesswork out of “how much” and “how often”. The TechLube is pre-engineered for just the right settings for your Sweco motor. And unlike most chemical dispensing lubricators, the TechLube is unaffected by altitude and has a wider range of operating temperatures.



THE AUTOMATIC SOLUTION
TO PROPER LUBRICATION


REDUCE YOUR
MAINTENANCE COSTS



We Put Technology In Motion™
www.sweco.com

SWECO HEADQUARTERS, P.O. Box 1509, 8029 U.S. Highway 25, Florence, KY 41022-1509: +1 (859) 371.4360 Fax: +1(859) 283.8469
SWECO MACON, 2919 Joycliff Road, Macon, GA 31211-2805: +1 (478) 745.5419 Fax: +1 (478) 741.1394
SWECO EUROPE S.A., Rue de la Recherche, 8, Parc Industriel Sud-Zone I, B-1400 Nivelles, Belgium: +32-67-893434 Fax: +32.67.214368
SWECO ASIA, 63 Hillview Ave. #03-02, Lam Soon Industrial Building, Singapore 669569:+65.6762.1167 Fax: +65.6762.1313
SWEQUIPOS S.A. DE C.V., Aut. Mex-Qro, #2500 Km. 23.2, Tlalnepantla, Edo. Mexico: +52 (5) 390-07-32, Fax: +52 (5) 565-98-18

Eliminate the Need For Manually Regreasing Your Sweco Round Separator

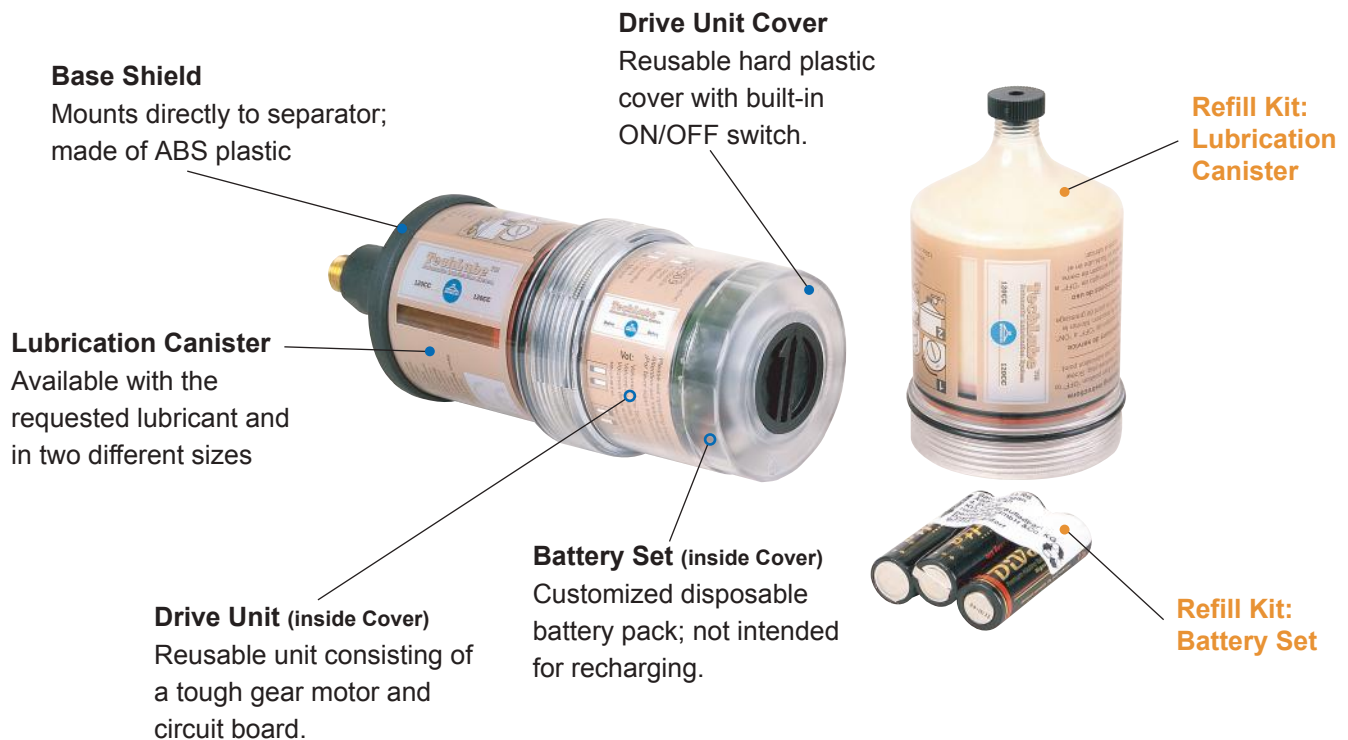

Benefits of TechLube Automatic Grease Lubricator

- Eliminates manual regreasing of bearings
- Promotes longer life of bearings
- Takes the “guesswork” out of “how much” and “how often”
- Has been pre-engineered for just the right settings for Sweco motors
- Provides visual indication of remaining grease
- More accurate over chemical lubrication devices
- Wider range of operating temperatures over chemical lubrication devices (14 to 122F, -10 to 50C)
- Dispensing operation is unaffected by altitude
- Self-contained, no electrical or air lines required
- Safe for hazardous environments
- Adapts directly to existing Sweco machines



Sweco TechLubes are available in sizes of 120cc (4 oz) and 250cc (8 oz) in standard and food grade lubricant.



A TechLube refill kit consists simply of one lubrication canister and one battery set.



We Put Technology In Motion™
e-mail: asap@sweco.com

