


ENGINEERED STRENGTH AND PERFORMANCE

weco[®] Magnum[™] is the most revolutionary advancement in separator screen technology in the last decade. Designed for increased strength, the patented Magnum screen has shown significantly improved screen life over traditional designs. Field testing has demonstrated effective screen life increases from 1.5 to 5 times, with no catastrophic failures. Advanced mesh fusion divides the screen into discrete zones, preventing propagation of most tears. The mesh fusion also enhances flow rates by stiffening the screen surface, which improves solids conveying. Available in 18 to 60 inch round and all sizes of rectangular and white water filter screens, the Magnum utilizes standard Sweco screen frames and FDA approved materials.

As part of Sweco's ATS[™] (Advanced Technology Screen) development program,

Magnum can also be custom configured to obtain the most effective performance for each application. Balancing screen life, capacity and blinding (plugging) resistance, Magnum screens can be tailored to meet the objectives of the specific operation.

Magnum - the future of screening technology - available from Sweco today.

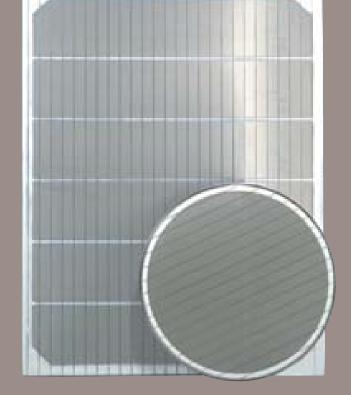



We Put Technology In Motion™

www.sweco.com

SWECO HEADQUARTERS, P.O. Box 1509, 8029 U.S. Highway 25, Florence, KY 41022-1509: +1 (859) 371.4360 Fax: +1(859) 283.8469 SWECO MACON, 2919 Joycliff Road, Macon, GA 31211-2805: +1 (478) 745.5419 Fax: +1 (478) 741.1394 SWECO EUROPE S.A., Rue de la Recherche, 8, Parc Industriel Sud-Zone I, B-1400 Nivelles, Belgium: +32-67-893434 Fax: +32.67.214368 SWECO ASIA, 63 Hillview Ave. #03-02, Lam Soon Industrial Building, Singapore 669569:+65.6762.1167 Fax: +65.6762.1313 SWEQUIPOS S.A. DE C.V., Aut. Mex-Qro, #2500 Km. 23.2, Tlalnepantla, Edo. Mexico: +52 (5) 390-07-32, Fax: +52 (5) 565-98-18

The latest in patented screen technology is here!

Features & Benefits

Longer Screen Life	Less equipment maintenance, reduced screen inventory,
	overall reduced operating costs.
Sturdy Construction	Coarse mesh strength for all sieve openings, rip-stop
	protection, standard Sweco screen frames, FDA approved
	materials.
Consistent Separation	Efficient mesh orientation produces accurate cut points,
	increased open area verses other bonded screens. Sweco
	screen certification available.
Excellent Blinding Resistence	Reduces mesh blinding (plugging), improves product recovery.
High Capacity Mesh	Produces optimal flow rates.
High Temperature Capable	Spot welded construction - 250°F
	Supertaut™ Plus construction - 200°F
Easy Installation	Eliminates center tie down for many applications. Reduces
	installation time, minimizes risk of damage to screen.

Application Oilfield Drilling Fluid Roofing Granules White Water Kaolin Clay Performance dependent

Performance

ı	Application	Life Improvement
ļ	Oilfield Drilling Fluid	1.5 - 5 Times
ı	Roofing Granules	1.5 - 3 Times
1	White Water	2 - 3 Times
1	Kaolin Clay	2 - 5 Times
ı	Performance dependent upon process, equipment settings and material.	

Magnum is covered by patent #6,202,856; additional patents pending

